

ΕΦΑΡΜΟΓΕΣ ΨΗΦΙΑΚΗΣ ΣΗΜΑΝΣΗΣ

DIGITAL
SIGN.gr

www.led-display.gr LED επιγραφές

Κατάλογος Προϊόντων

- Η ψηφιακή σήμανση παίζει σημαντικό ρόλο στη σημερινή κοινωνία, όχι μόνο ως μόδα σε μια πόλη, αλλά και σαν παγκόσμια τάση!
- Μπορείτε να δείτε την ψηφιακή σήμανση σε διαφορετικά σενάρια, έχει γίνει σημάδι προόδου στην εποχή της οθόνης!
 - Μπορείτε να παρουσιάσετε αυτά που θέλετε: Απλά, εύκολα και γρήγορα!

DIGITAL SIGNAGE

PRODUCT RANGE

INDOOR WALL-MOUNTED DISPLAY



- Beautiful appearance, narrow aluminum frame with brushed processing surface
- Metal housing make the body stronger and with tempered glass in front of the panel to protect the screen
- Customers can choose horizontal or vertical installation way
- Support Capacitive touch / IR touch

	Item	Specifications	Unit
Panel	Panel size	10.1"~100"	inch
	Panel backlight	TFT-LCD	/
	Number of pixel	1080x1920 or 2160* 3840	pixel
	Luminance of white	300 (Typ.) ~500 (Typ.)	nits
	Contrast ratio	1000/1200/3000/4000/5000:1	/
	Viewing angle	178/178 (wide)	degree
	Aspect ratio	16:9	/
	Response time	6	m-sec
	Life time	60,000	hours
	O/S	V59 / Monitor / Android / Windows	



PRODUCT RANGE

INDOOR FREE-STANDING DISPLAY



- Beautiful appearance, narrow aluminum frame with brushed processing surface
- Metal housing make the body stronger and with tempered glass in front of the panel to protect the screen
- Classic model with ultra-thin body design
- Support Capacitive touch / IR touch

	Item	Specifications	Unit
Panel	Panel size	32" 43" 49" 55" 65" 75" 86" 98"100"	inch
	Panel backlight	TFT-LCD	/
	Number of pixel	1080x1920 or 2160* 3840	pixel
	Luminance of white	300 (Typ.) ~500 (Typ.)	nits
	Contrast ratio	1000/1200/3000/4000/5000:1	/
	Viewing angle	178/178 (wide)	degree
	Aspect ratio	16:9	/
	Response time	6	m-sec
	Life time	60,000	hours
	O/S	V59 / Monitor / Android / Windows	



PRODUCT RANGE

INDOOR K/S DESIGN INTERACTIVE KIOSK

- Beautiful appearance, narrow aluminum frame with brushed processing surface
- Metal housing make the body stronger and with tempered glass in front of the panel to protect the screen
- Support Capacitive touch / IR touch
- Customers can choose K/S base, standard colors have white/silver/black
- All-in-one interactive kiosk is suitable for a wide variety of scenarios: shopping mall navigation, game center, cafes, cinemas and some public places



	Item	Specifications	Unit
Panel	Panel size	21.5" 27" 32" 43" 49" 55" 65" 75" 86" 98"100"	inch
	Panel backlight	TFT-LCD	/
	Number of pixel	1080x1920 or 2160* 3840	pixel
	Luminance of white	300 (Typ.) ~500 (Typ.)	nits
	Contrast ratio	1000/1200/3000/4000/5000:1	/
	Viewing angle	178/178 (wide)	degree
	Aspect ratio	16:9	/
	Response time	6	m-sec
	Life time	60,000	hours
	O/S	Touch Android / Touch Windows	

PRODUCT RANGE

OUTDOOR WALL-MOUNTED DISPLAY



- High brightness screen, from 1500nits up to 3000 nits
- Waterproof, the touch function also can use under raining
- Automatic light sensor control, automatically adjust the brightness of light, to maximise energy efficiency according to the environment.

Features for outdoor	Conservation of vision	AR glass and light sensor (automatic change the brightness be based on sun light)
	Thermostatic control	Temperature detector, center control PCB
	Cooling System	Powerful Turbofan & cross flow fan
		Fans cooling / AC cooling
	Hypothermia protection	Heater (aluminium sheet warmer)(Optional)
	IP code	IP65
	Working temperature	-15°Cto 50°C
	Storage temperature	-15°Cto 50°C
	Working temperature	20% ~ 80%
	Storage temperature	10% ~ 90%

	Item	Specifications	Unit
Panel	Panel size	18.5"~75"	inch
	Panel backlight	TFT-LCD	/
	Number of pixel	1080x1920 or 2160*3840	pixel
	Luminance of white	1500 (Typ.) ~3500 (Typ.)	nits
	Contrast ratio	1000/1200/3000/4000 /5000:1	/
	Viewing angle	178/178 (wide)	degree
	Aspect ratio	16:9	/
	Response time	6	m-sec
	Life time	60,000	hours
	O/S	V59 / Monitor / Android / Windows	

PRODUCT RANGE

OUTDOOR FREE-STANDING DISPLAY



- High brightness screen, from 1500nits up to 3000 nits
- Waterproof, the touch function also can use under raining
- Automatic light sensor control, automatically adjust the brightness of light, to maximise energy efficiency according to the environment.

Features for outdoor	Conservation of vision	AR glass and light sensor (automatic change the brightness be based on sun light)	
	Thermostatic control	Temperature detector, center control PCB	
	Cooling System	Powerful Turbofan & cross flow fan	
		Fans cooling / AC cooling	
	Hypothermia protection	Heater (aluminium sheet warmer)(Optional)	
	IP code	IP65	
	Working temperature	-15°Cto 50°C	
	Storage temperature	-15°Cto 50°C	
	Working temperature	20% ~ 80%	
	Storage temperature	10% ~ 90%	

	Item	Specifications	Unit
Panel	Panel size	43"~100"	inch
	Panel backlight	TFT-LCD	/
	Number of pixel	1080x1920 or 2160* 3840	pixel
	Luminance of white	1500 (Typ.) ~3500 (Typ.)	nits
	Contrast ratio	1000/1200/3000/4000/5000:1	/
	Viewing angle	178/178 (wide)	degree
	Aspect ratio	16:9	/
	Response time	6	m-sec
	Life time	60,000	hours
	O/S	V59 / Monitor / Android / Windows	

PRODUCT RANGE

OUTDOOR FREE-STANDING DISPLAY



- High brightness screen, from 1500nits up to 3000 nits
- Waterproof, the touch function also can use under raining
- Automatic light sensor control, automatically adjust the brightness of light, to maximise energy efficiency according to the environment.
- Installation way: Fix to the ground with expansion screw

Features for outdoor	Conservation of vision	AR glass and light sensor (automatic change the brightness be based on sun light)	
	Thermostatic control	Temperature detector, center control PCB	
	Cooling System	Powerful Turbofan & cross flow fan	
		Fans cooling / AC cooling	
	Hypothermia protection	Heater (aluminium sheet warmer)(Optional)	
	IP code	IP65	
	Working temperature	-15°Cto 50°C	
	Storage temperature	-15°Cto 50°C	
	Working temperature	20% ~ 80%	
	Storage temperature	10% ~ 90%	

	Item	Specifications	Unit
Panel	Panel size	43"~100"	inch
	Panel backlight	TFT-LCD	/
	Number of pixel	1080x1920 or 2160* 3840	pixel
	Luminance of white	1500 (Typ.) ~3500 (Typ.)	nits
	Contrast ratio	1000/1200/3000/4000/5000:1	/
	Viewing angle	178/178 (wide)	degree
	Aspect ratio	16:9	/
	Response time	6	m-sec
	Life time	60,000	hours
	O/S	V59 / Monitor / Android / Windows	

PRODUCT RANGE

OUTDOOR FREE-STANDING Telephone Booth DISPLAY



- High brightness screen, from 1500nits up to 3000 nits
- Waterproof, the touch function also can use under raining
- Automatic light sensor control, automatically adjust the brightness of light, to maximise energy efficiency according to the environment.
- Double screens use for advertising display and for cellphone charge, wifi connect, make a phone call
- Installation way: Fix to the ground with expansion screw

Features for outdoor	Conservation of vision	AR glass and light sensor (automatic change the brightness be based on sun light)
	Thermostatic control	Temperature detector, center control PCB
	Cooling System	Powerful Turbofan & cross flow fan
		Fans cooling / AC cooling
	Hypothermia protection	Heater (aluminium sheet warmer)(Optional)
	IP code	IP65
	Working temperature	-15°Cto 50°C
	Storage temperature	-15°Cto 50°C
	Working temperature	20% ~ 80%
	Storage temperature	10% ~ 90%

	Item	Specifications	Unit
Panel	Panel size	10.1"~100"	inch
	Panel backlight	TFT-LCD	/
	Number of pixel	1080x1920 or 2160* 3840	pixel
	Luminance of white	1500 (Typ.) ~3500 (Typ.)	nits
	Contrast ratio	1000/1200/3000/4000/5000:1	/
	Viewing angle	178/178 (wide)	degree
	Aspect ratio	16:9	/
	Response time	6	m-sec
	Life time	60,000	hours
	O/S	V59 / Monitor / Android / Windows	

PRODUCT RANGE

INDOOR HANGING DOUBLE-SIDE WINDOW FACING DISPLAY



- Double-sided design, face indoor side 350nits, face window side 700~1000nits
- Ultra-slim body and Ultra-slim frame, the top empty part can make customers' LOGO
- Non-touch function
- Installation way: hanging from the ceiling
- Application scenarios: Banks, shopping mall, clothing stores, supermarkets

	Item	Specifications	Unit
Panel (2 Screens with android board and driver board)	Panel size	43" 49" 55"	inch
	Panel backlight	LED(CCFL)-Backlight	/
	Number of pixel	1080x1920	pixel
	Luminance of white	350(Typ.) ~1000 (Typ.)	nits
	Contrast ratio	1000:1	/
	Viewing angle	178/178 (wide)	degree
	Aspect ratio	16:9	/
	Response time	6	m-sec
	Life time	60,000	hours
O/S	V59 / Monitor / Android / Windows		

PRODUCT RANGE

INDOOR HANGING DOUBLE-SIDE WINDOW FACING DISPLAY



- Double-sided design, face indoor side 350nits, face window side 700~1000nits
- Ultra-slim body and Ultra-slim frame, the top empty part can make customers' LOGO
- Non-touch function
- Installation way: hanging from the ceiling
- Application scenarios: Banks, shopping mall, clothing stores, supermarkets

	Item	Specifications	Unit
Panel (2 Screens with android board and driver board)	Panel size	43" 49" 55"	inch
	Panel backlight	LED(CCFL)-Backlight	/
	Number of pixel	1080x1920	pixel
	Luminance of white	350(Typ.) ~1000 (Typ.)	nits
	Contrast ratio	1000:1	/
	Viewing angle	178/178 (wide)	degree
	Aspect ratio	16:9	/
	Response time	6	m-sec
	Life time	60,000	hours
	O/S	V59 / Monitor / Android / Windows	

PRODUCT RANGE

INDOOR WINDOW DISPLAY HIGH BRIGHTNESS



- 4k High brightness single-sided display, 1500 nits~2000 nits
- Super-slim body and an ultra-slim frame, rounded corner design, brushed metal, excellent appearance
- Support 24/7 running
- Installation way: wall-mounted, hanging, floor standing.

	Item	Specifications	Unit
Panel	Panel size	43" 49" 55"	inch
	Panel backlight	E-LED	/
	Number of pixel	1080x1920 or 2160*3840	pixel
	Luminance of white	1500(Typ.) &~2000 (Typ.)	nits
	Contrast ratio	1000:1	/
	Viewing angle	178/178 (wide)	degree
	Aspect ratio	16:9	/
	Response time	6	m-sec
	Life time	60,000	hours
	O/S	V59 / Monitor / Android / Windows	

PRODUCT RANGE

INDOOR WINDOW FACING HIGH BRIGHTNESS DOUBLE-SIDE DISPLAY



- 4k High brightness Double-sided display, 3000 nits & 700 nits
- Ultra-slim body and Ultra-slim frame, the top empty part can make customers' LOGO
- Support 24/7 running
- The perfect solution for the retail store

	Item	Specifications	Unit
Panel (2 Screens with android board and driver board)	Panel size	43" 49" 55"	inch
	Panel backlight	E-LED	/
	Number of pixel	1080x1920 or 2160*3840	pixel
	Luminance of white	700(Typ.) & 3000 (Typ.)	nits
	Contrast ratio	1000:1	/
	Viewing angle	178/178 (wide)	degree
	Aspect ratio	16:9	/
	Response time	6	m-sec
	Life time	60,000	hours
O/S	V59 / Monitor / Android / Windows		

PRODUCT RANGE

INDOOR ROTATABLE KIOSK



- Flexible application, rotatable to any angle within 90°
- Smart gravity sensor, display content will be automatically changed to the right position, to use the display just like use your cellphone



	Item	Specifications	Unit
Panel	Panel size	43" 49" 55" 65" 75" 86" 98" 100"	inch
	Panel backlight	TFT-LCD	/
	Number of pixel	1080x1920 or 2160* 3840	pixel
	Luminance of white	300 (Typ.) ~500 (Typ.)	nits
	Contrast ratio	1000/1200/3000/4000/ 5000:1	/
	Viewing angle	178/178 (wide)	degree
	Aspect ratio	16:9	/
	Response time	6	m-sec
	Life time	60,000	hours
	O/S	V59 / Monitor / Android / Windows	



PRODUCT RANGE

LCD VIDEO WALL

- Ultra-slim structure design, convenient/elegant, multiple sources input,
- Fit for all application, low calorific value, LCD display unit.
- 1920*1080P HD resolution, high brightness improves display administrative level
- Flexible matching style, can satisfied our bigger screen favourites.
- Available Samsung, LG & BOE Panels,

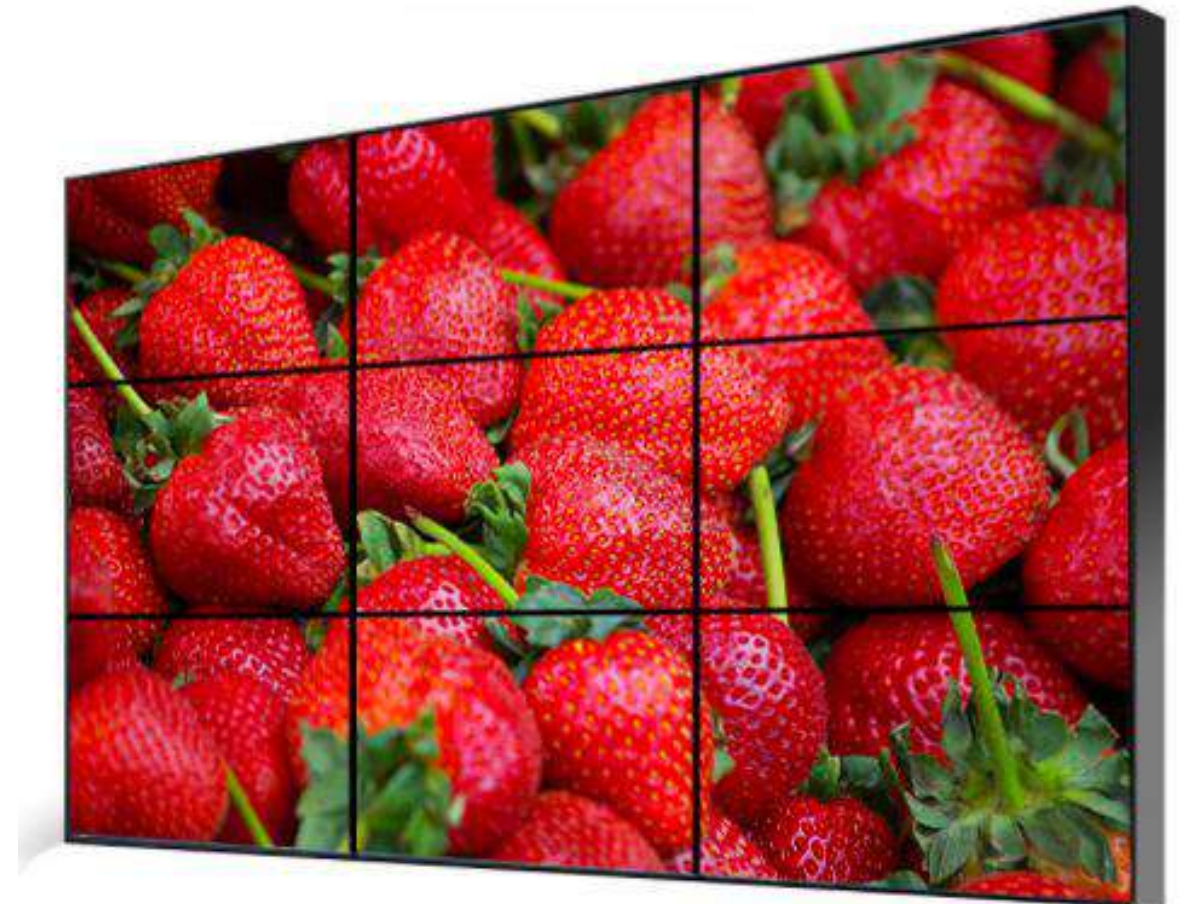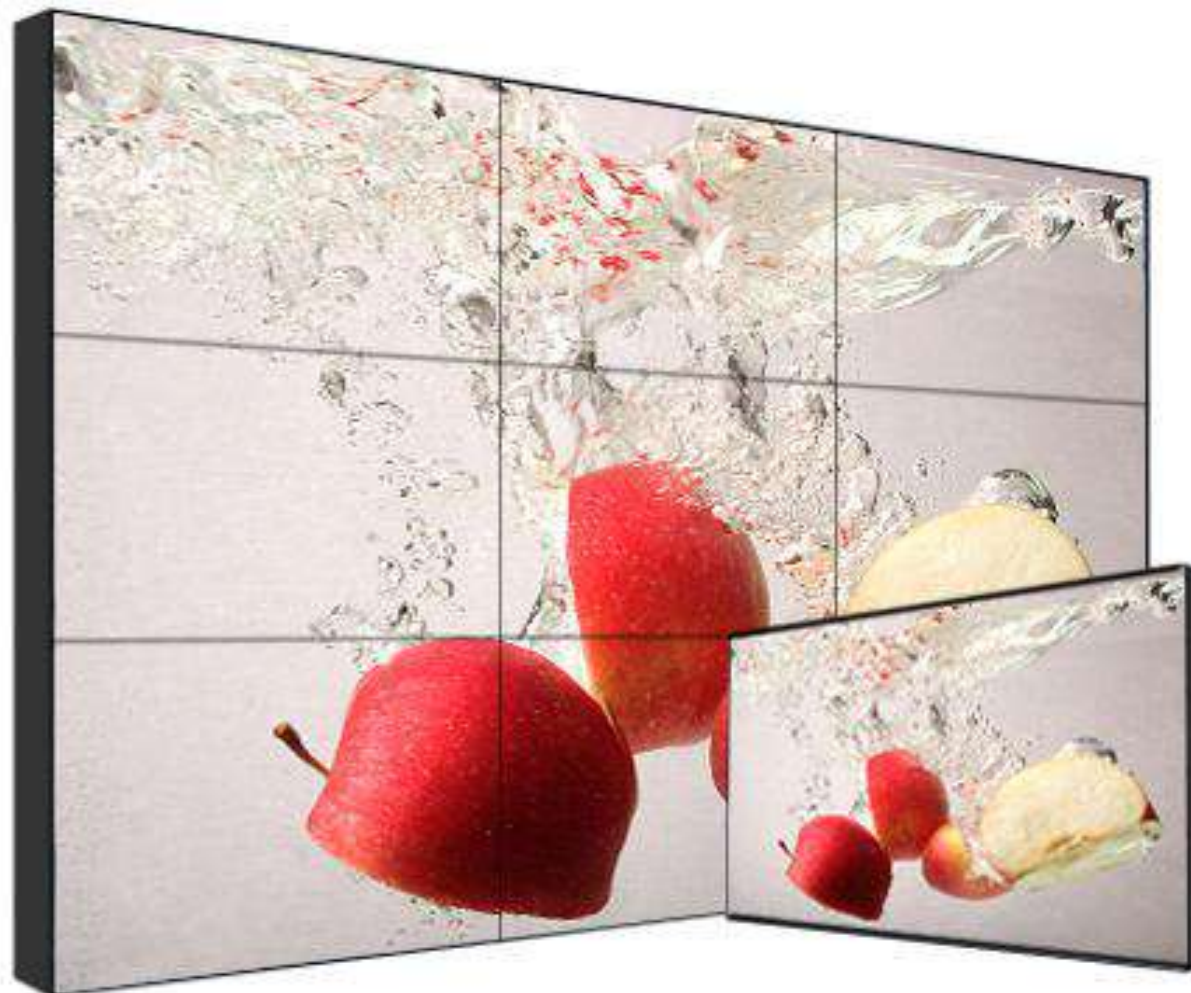

	Item	Specifications	Unit
Panel	Panel size	46" 49" 55"	inch
	Panel backlight	LED backlight	/
	Number of pixel	1080x1920	pixel
	Luminance of white	500 (Typ.)~700 (Typ.)	nits
	Contrast ratio	1000:1	/
	Viewing angle	178/178 (wide)	degree
	Aspect ratio	16:9	/
	Response time	6	m-sec
	Life time	60,000	hours
	O/S	Monitor	

PRODUCT RANGE

R1500 & R1800 CURVED TOUCH MONITOR



- O/S : Touch monitor / android / windows
- Installation way: wallouted, freestanding
- Available size: 32" & 43"

	Item	Specifications	Unit
Panel	Panel size	32" & 43"	inch
	Pixel Pitch	0.2451x0.2451	mm
	Curvature	R1500 & R1800	
	Panel backlight	LED-backlight	/
	Number of pixel	1080*1920 or 2160* 3840	pixel
	Luminance of white	450 (Typ.)	nits
	Contrast ratio	1200:1	/
	Viewing angle	178/178 (wide)	degree
	Aspect ratio	16:9	/
	Response time	6	m-sec
	Life time	60,000	hours

PRODUCT RANGE

DIGITAL DISPLAY POSTER




- Foldable stand bracket and super slim body makes the kiosk very easy to carry around. Higher
- Security Toughened Glass
- Plug & play function
- Support touch function
- Sliver/black/white color available

	Item	Specifications	Unit
Panel	Panel size	32" 43" 49" 55"	inch
	Panel backlight	E-LED	/
	Number of pixel	1080x1920	pixel
	Luminance of white	300(Typ.)	nits
	Contrast ratio	1000:1	/
	Viewing angle	178/178 (wide)	degree
	Aspect ratio	16:9	/
	Response time	6	m-sec
	Life time	60,000	hours
	O/S	V59 / Monitor / Android / Windows	

PRODUCT RANGE

DIGITAL DISPLAY POSTER

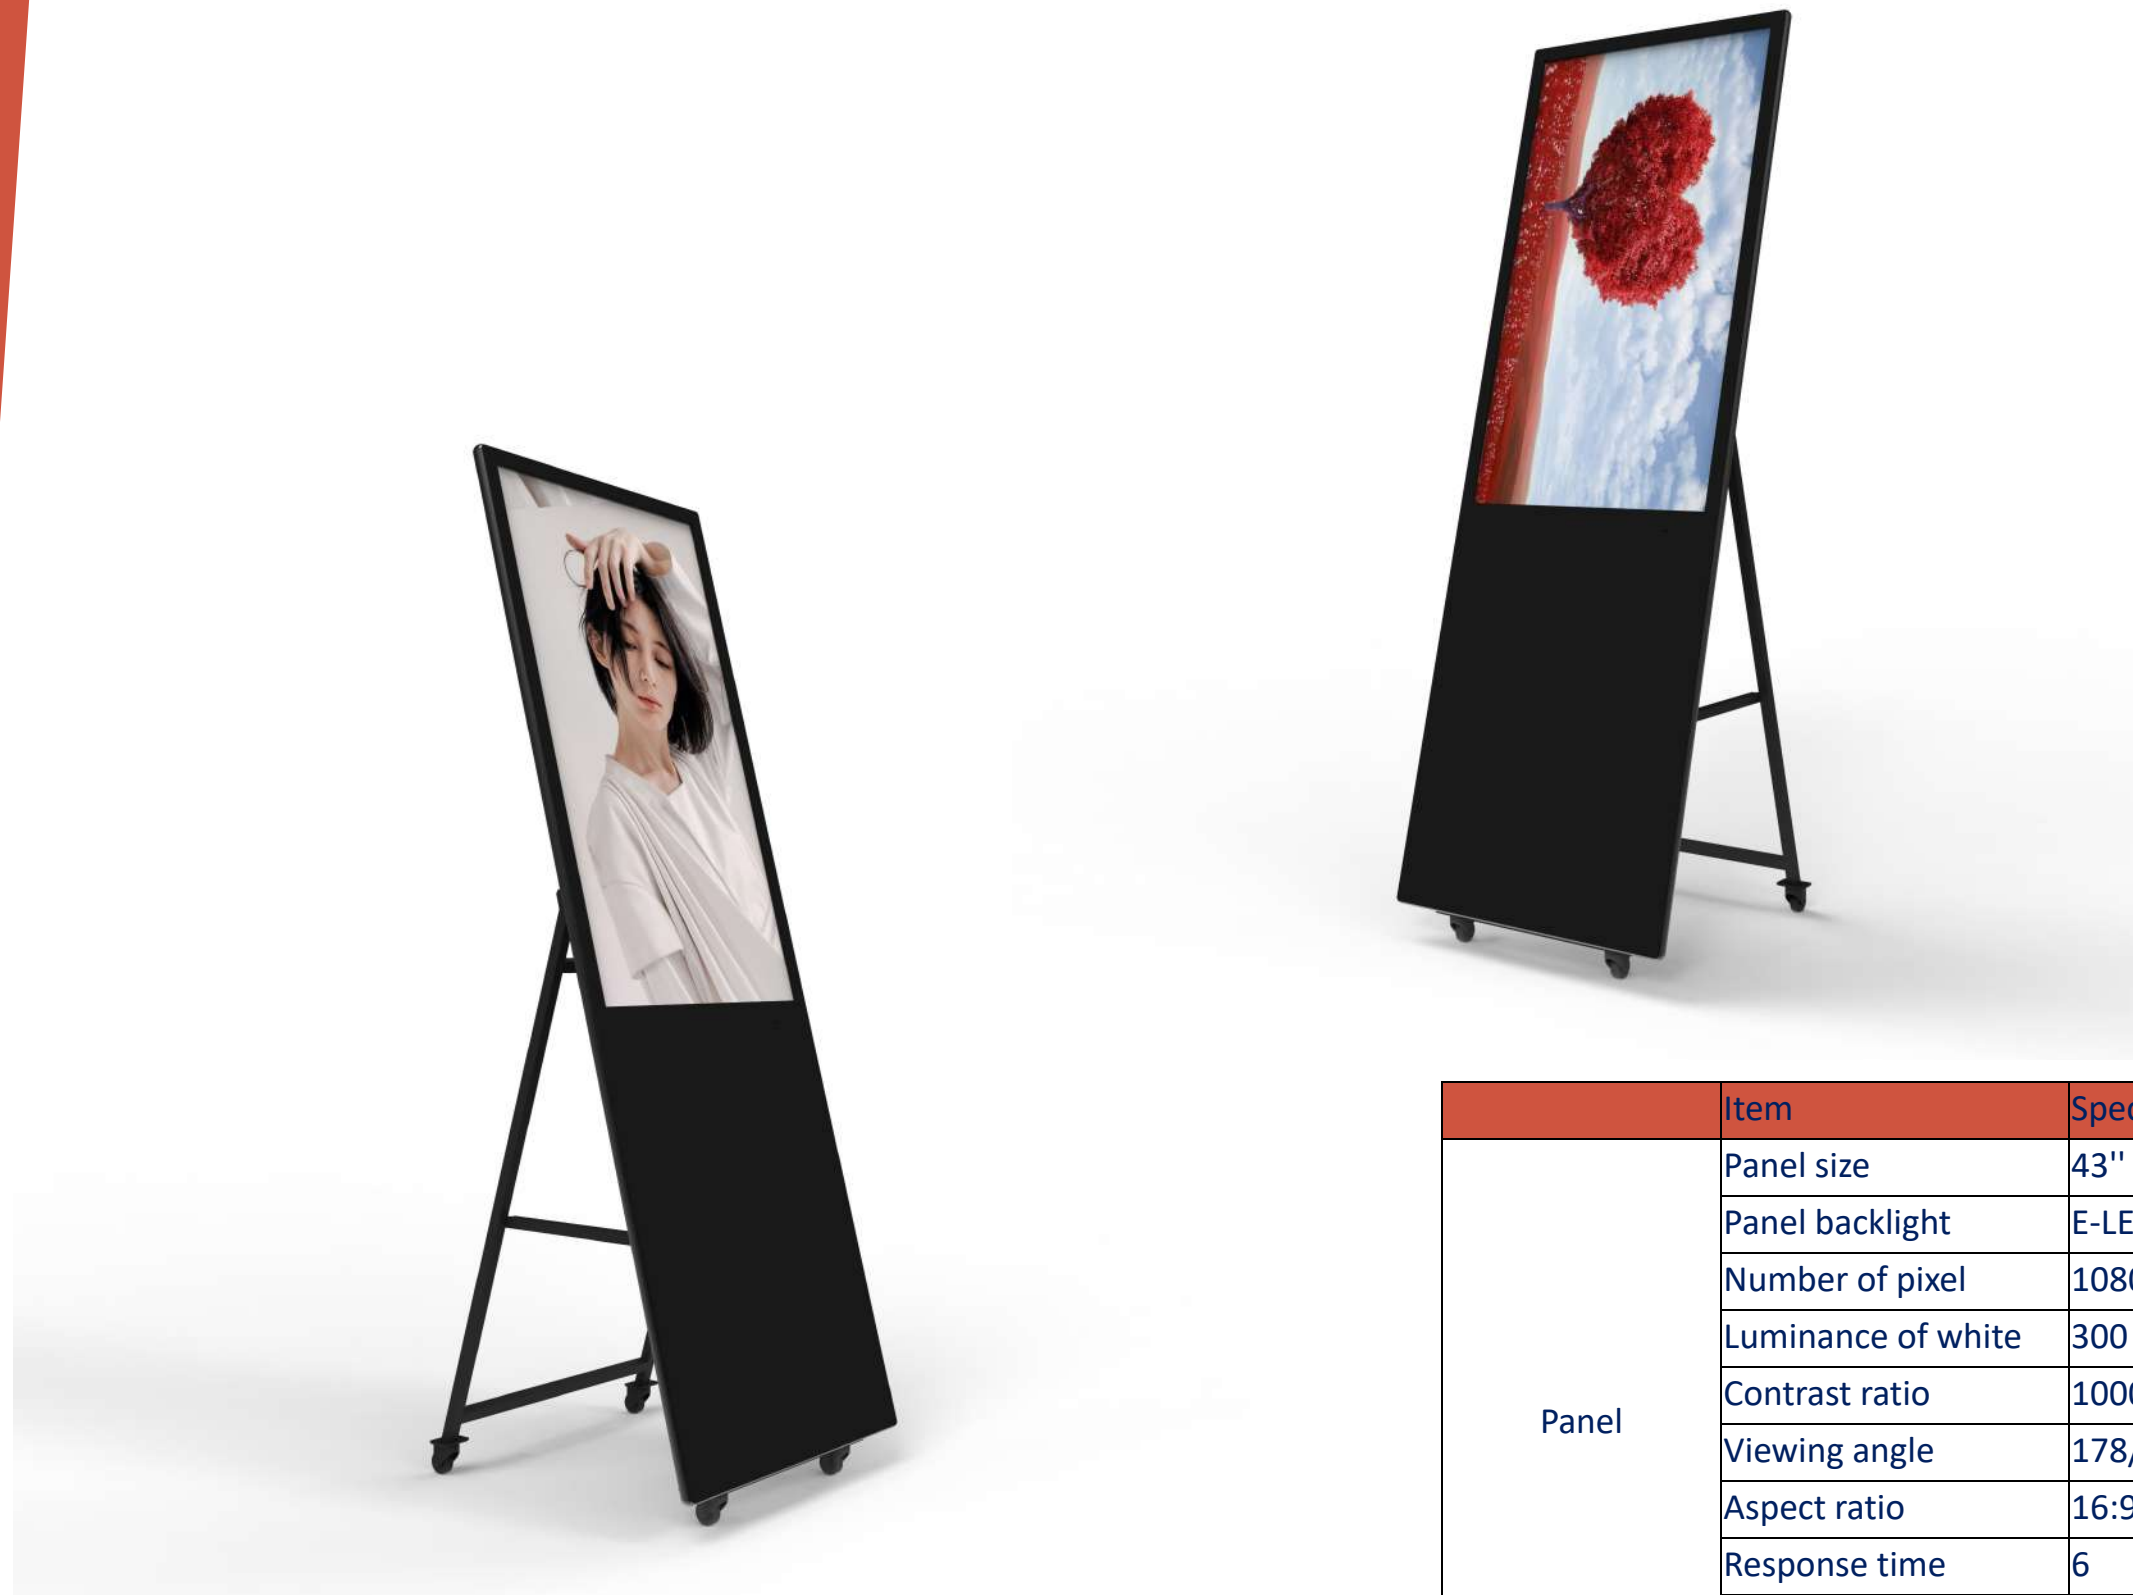


- Foldable stand bracket and super slim body makes the kiosk very easy to carry around. Higher
- Security Toughened Glass
- Plug & play function
- Sliver/black/white color available

	Item	Specifications	Unit
Panel	Panel size	43" 49" 55"	inch
	Panel backlight	E-LED	/
	Number of pixel	1080x1920	pixel
	Luminance of white	300 (Typ.)	nits
	Contrast ratio	1000:1	/
	Viewing angle	178/178 (wide)	degree
	Aspect ratio	16:9	/
	Response time	6	m-sec
	Life time	60,000	hours
	O/S	V59 / Monitor / Android / Windows	

DIGITAL SIGNAGE

PRODUCT RANGE

DIGITAL MENU BOARD

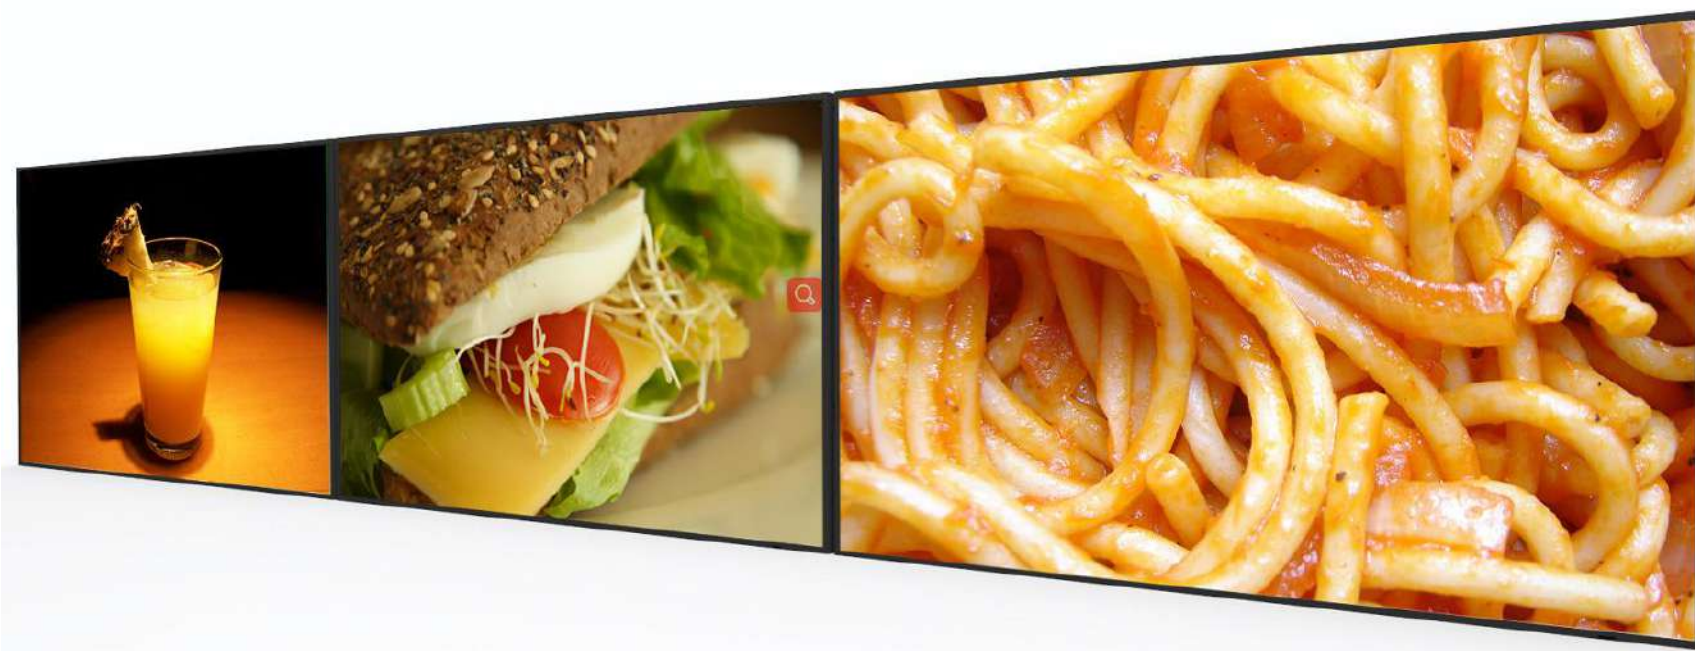


- Super narrow bezel, more professional then TV display
- Integrated Android Media Player
- Portrait/Landscape Orientation
- Designed to run 24/7 in constant use the display has an advanced temperature control system to keep it running at the optimum temperature no matter the environment.




	Item	Specifications	Unit
Panel	Panel size	32" 43" 49" 55" 65"	inch
	Panel backlight	E-LED	/
	Number of pixel	1080x1920	pixel
	Luminance of white	450(Typ.)	nits
	Contrast ratio	4000:1	/
	Viewing angle	178/178 (wide)	degree
	Aspect ratio	16:9	/
	Response time	6	m-sec
	Life time	60,000	hours
	O/S	V59 / Monitor / Android	

PRODUCT RANGE

EMBEDDED TOUCH DISPLAY

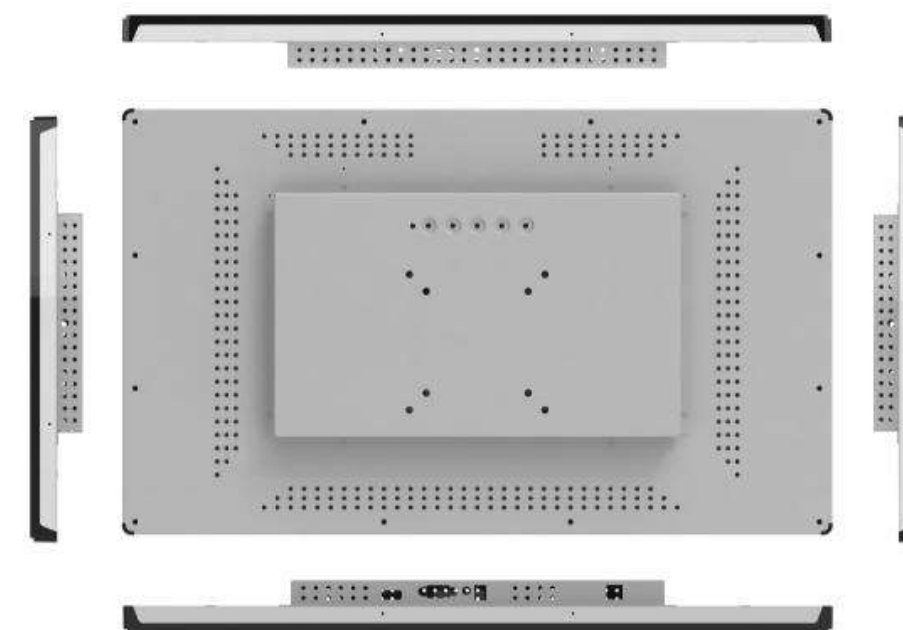

- Embedded systems allow you to better blend the background of your digital signage, and can be embedded into other devices as well
- Integrated Android Media Player, Portrait/Landscape Orientation
- Tough Tempered Glass. High brightness up to 1000 nits~1500 nits

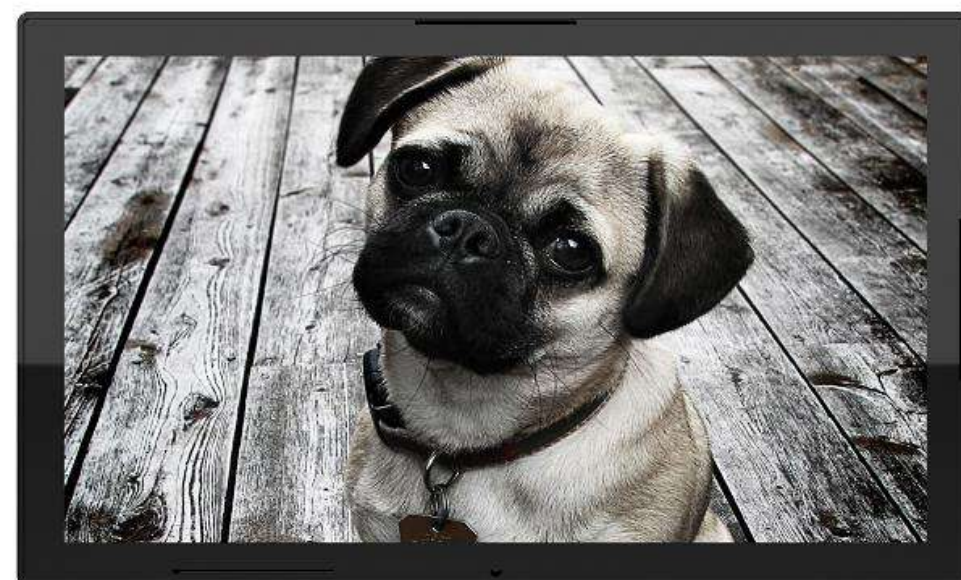

	Item	Specifications	Unit
Panel	Panel size	10.1"~65"	inch
	Panel backlight	E-LED	/
	Number of pixel	1080x1920	pixel
	Luminance of white	450(Typ.)	nits
	Contrast ratio	1000~5000:1	/
	Viewing angle	178/178 (wide)	degree
	Aspect ratio	16:9	/
	Response time	6	m-sec
	Life time	60,000	hours
	O/S	V59 / Monitor / Android / Window	

PRODUCT RANGE

ULTRA-WIDE STRETCHED BAR DISPLAY




- Lower power consumption & High Brightness & High image quality
- Application scenario: In the supermarket replace messy price or promotion labels. In the retail store can easy to show more product models, types and advantages
- small and portable

	Item	Specifications	Unit
Panel	Panel size	12.2"~88"	inch
	Panel backlight	LED-backlight	/
	Number of pixel	1920*158/2880*158/1920*540/3840*160(24:1)	pixel
	Luminance of white	500~700(Typ.)	nits
	Contrast ratio	3000:1	/
	Viewing angle	178/178	degree
	Aspect ratio	12:1/18:1/16:4.5/24:1	/
	Response time	6	m-sec
	Life time	60,000	hours
	O/S	V59 / Monitor / Android	

PRODUCT RANGE

ULTRA-WIDE STRETCHED BAR DISPLAY

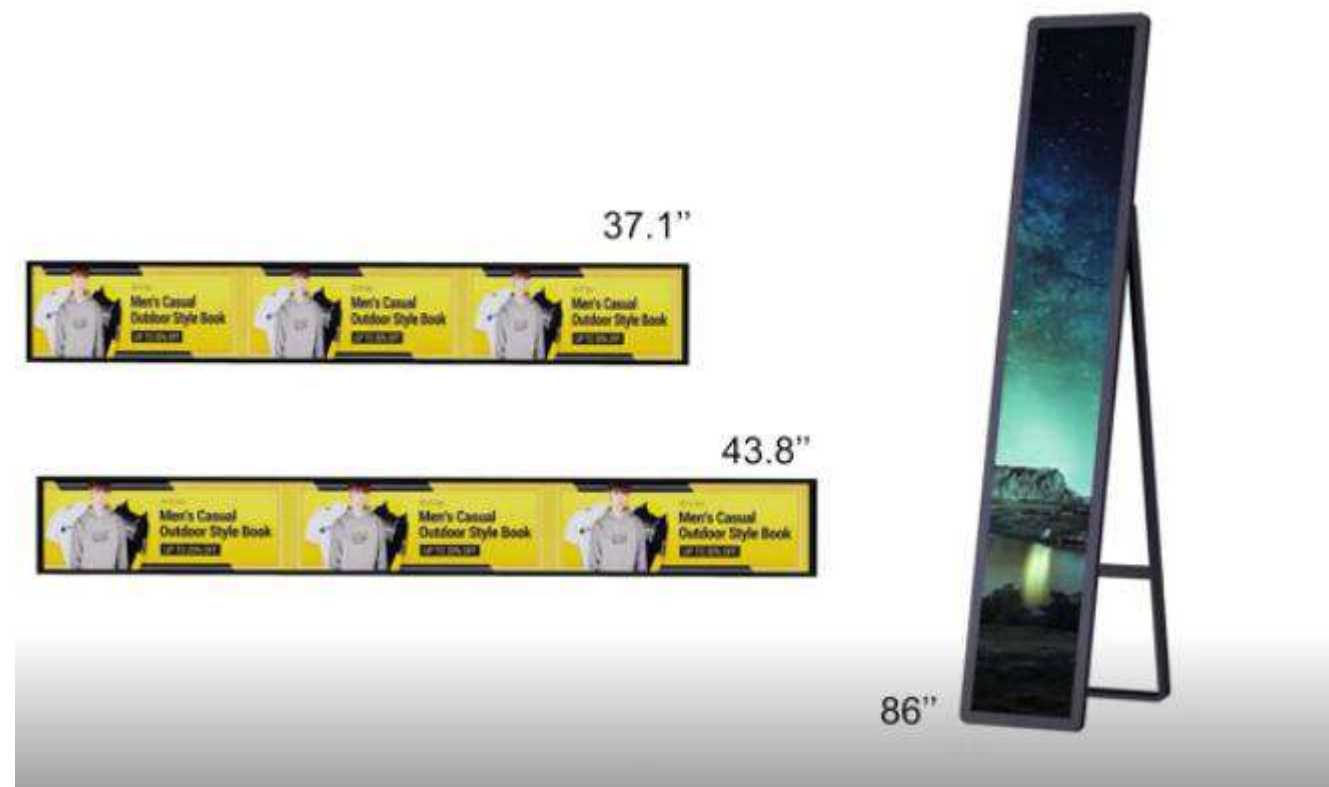

- Lower power consumption & High Brightness & High image quality
- Application scenario: In the supermarket replace messy price or promotion labels. In the retail store can easy to show more product models, types and advantages
- small and portable

	Item	Specifications	Unit
Panel	Panel size	23"~86"	inch
	Panel backlight	LED-backlight	/
	Number of pixel	1920*158/2880*158/1920*540/3840*160(24:1)	pixel
	Luminance of white	500~700(Typ.)	nits
	Contrast ratio	3000:1	/
	Viewing angle	178/178	degree
	Aspect ratio	12:1/18:1/16:4.5/24:1	/
	Response time	6	m-sec
	Life time	60,000	hours
	O/S	V59 / Monitor / Android	

SALES&SERVICES



Parodos Iasiou - 12131- Peristeri
tel.: +30 210 3642031-2

- B2B & B2C Sales
- Large Volume Sales at attractive prices
- Customized product design based on customer's requirements
- One year Warranty on all products
- Periodical Maintenance & Service
- 24/7 Customer Service Support
- Software & Hardware Support
- Digital signage marketing information sharing

DIGITAL SIGNAGE

MARKETING APPLICATION SCENARIOS



Station



Office Building



Plaza



Hospital



Hotel



Automobile Store

DIGITAL SIGNAGE

MARKETING APPLICATION SCENARIOS



Station



Office Building



Plaza



Hospital



Hotel



Automobile Store

Application



DIGITAL SIGNAGE

MARKETING APPLICATION SCENARIOS



DIGITAL SIGNAGE

MARKETING APPLICATION SCENARIOS

Hotel and Restaurants



Leisure Venues



Healthcare



Education



Local Government



Retail



Digital Sign - Led Display
Parodos Iasiou - 12136 - Peristeri
Tel.: +30 210 3642031-2

E M A I L : info@digitalsign.gr
info@led-display.gr

W E B : www.digitalsign.gr
www.led-display.gr